



# ERF8-FS4B-10BPVC

M8 Female, 0° Straight, 4 Pin, PVC,  
10 Meters, 4x0,34 mm<sup>2</sup>

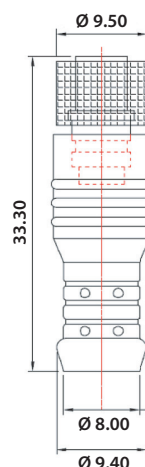

## Technical Data

|                       |                      |                           |                                 |
|-----------------------|----------------------|---------------------------|---------------------------------|
| Standard              | IEC 61076            | Contact Carriers Material | PU / PA                         |
| Series                | M8, Female, Straight | Contact Material          | Copper Alloy, Gold-Plated       |
| Number of Pins        | 04 Pin               | Metal of Nut              | Copper Alloy with Nickel Plated |
| Rated Current         | 3A max.              | Seal                      | Silicone                        |
| Rated Voltage         | 60V max.             | Cable Jacket Material     | PVC                             |
| Insulation Resistance | ≥100MΩ               | Color                     | Optional                        |
| Contact Resistance    | ≤ -5mΩ               | Shielding                 | Optional                        |
| Ambient Temperature   | -25 ~ +75°C          | Mechanical Life           | > 100 Mating Cycles             |
| IP Class              | IP67                 | —                         | —                               |

| ARTICLE NO       | TYPE       | ANGLE        | PIN   | CABLE LENGTH | COLOR | CABLE TYPE | CABLE SECTION            |
|------------------|------------|--------------|-------|--------------|-------|------------|--------------------------|
| ERF8-FS4B-10BPVC | F - FEMALE | S - STRAIGHT | 4 PIN | 10 METERS    | BLACK | PVC        | 4 x 0,34 mm <sup>2</sup> |