



# ERF8-MA3B-03BPVC

M8 Male, 0° Angled, 3 Pin, PVC,  
03 Meters, 3x0,34 mm<sup>2</sup>

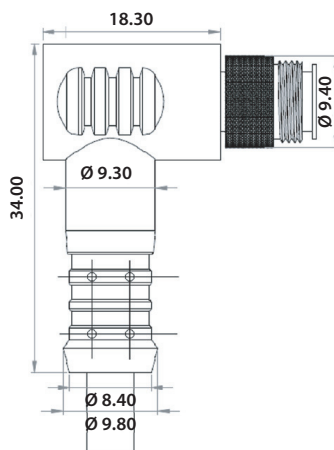

## Technical Data

|                       |                  |                           |                                 |
|-----------------------|------------------|---------------------------|---------------------------------|
| Standard              | IEC 61076        | Contact Carriers Material | PU / PA                         |
| Series                | M8, Male, Angled | Contact Material          | Copper Alloy, Gold-Plated       |
| Number of Pins        | 03 Pin           | Metal of Nut              | Copper Alloy with Nickel Plated |
| Rated Current         | 3A max.          | Seal                      | Silicone                        |
| Rated Voltage         | 60V max.         | Cable Jacket Material     | PVC                             |
| Insulation Resistance | ≥100MΩ           | Color                     | Optional                        |
| Contact Resistance    | ≤ -5mΩ           | Shielding                 | Optional                        |
| Ambient Temperature   | -25 ~ +75°C      | Mechanical Life           | > 100 Mating Cycles             |
| IP Class              | IP67             | —                         | —                               |

| ARTICLE NO       | TYPE     | ANGLE      | PIN   | CABLE LENGTH | COLOR | CABLE TYPE | CABLE SECTION            |
|------------------|----------|------------|-------|--------------|-------|------------|--------------------------|
| ERF8-MA3B-03BPVC | M - MALE | A - ANGLED | 3 PIN | 3 METERS     | BLACK | PVC        | 3 x 0,34 mm <sup>2</sup> |