



# ERF8-MS3B-15BPUR

M8 Male, 0° Straight, 3 Pin, PUR,  
15 Meters, 3x0,34 mm<sup>2</sup>

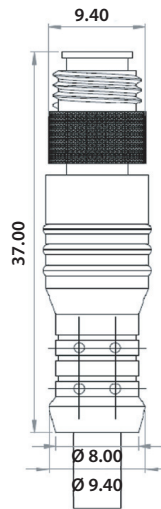

## Technical Data

|                       |                    |                           |                                 |
|-----------------------|--------------------|---------------------------|---------------------------------|
| Standard              | IEC 61076          | Contact Carriers Material | PU / PA                         |
| Series                | M8, Male, Straight | Contact Material          | Copper Alloy, Gold-Plated       |
| Number of Pins        | 03 Pin             | Metal of Nut              | Copper Alloy with Nickel Plated |
| Rated Current         | 3A max.            | Seal                      | Silicone                        |
| Rated Voltage         | 60V max.           | Cable Jacket Material     | PUR                             |
| Insulation Resistance | ≥100MΩ             | Color                     | Optional                        |
| Contact Resistance    | ≤ -5mΩ             | Shielding                 | Optional                        |
| Ambient Temperature   | -25 ~ +75°C        | Mechanical Life           | > 100 Mating Cycles             |
| IP Class              | IP67               | —                         | —                               |

| ARTICLE NO       | TYPE     | ANGLE        | PIN   | CABLE LENGTH | COLOR | CABLE TYPE | CABLE SECTION            |
|------------------|----------|--------------|-------|--------------|-------|------------|--------------------------|
| ERF8-MS3B-15BPUR | M - MALE | S - STRAIGHT | 3 PIN | 15 METERS    | BLACK | PUR        | 3 x 0,34 mm <sup>2</sup> |