
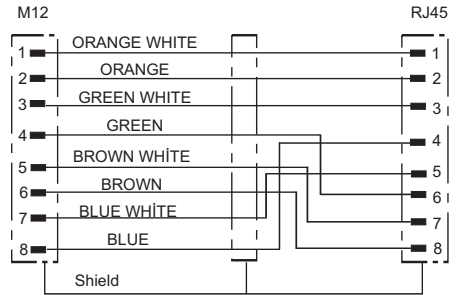




# ERF-M12MS8X-NW8-12SGLSZH

X Code M12 Male 0° Straight, RJ45 Male 0° Straight, 8 Pin, LSZH, 12 Meters

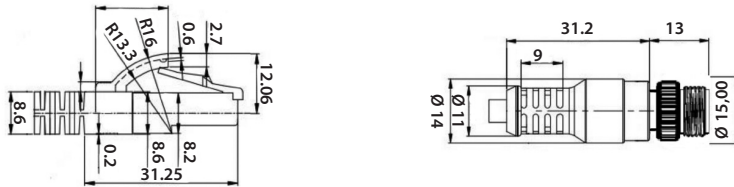

## Technical Data

|                       |                |                           |                                 |
|-----------------------|----------------|---------------------------|---------------------------------|
| Standard              | IEC 61076      | Contact Carriers Material | CU / AU                         |
| Series                | Male, Straight | Contact Material          | Copper Alloy, Gold-Plated       |
| Pin                   | Cu / Au        | Metal of Nut              | Copper Alloy with Nickel Plated |
| Rated Current         | 1,5 A max      | Seal                      | Silicone                        |
| Rated Voltage         | 60V max.       | Cable Jacket Material     | LSZH                            |
| Insulation Resistance | ≥100MΩ         | Color                     | Optional                        |
| Contact Resistance    | ≤ -5mΩ         | Shielding                 | Optional                        |
| Ambient Temperature   | -25 ~ +85°C    | Mechanical Life           | > 100 Mating Cycles             |
| IP Class              | IP67           |                           |                                 |

| ARTICLE NO               | TYPE     | ANGLE        | PIN   | CABLE LENGTH | COLOR | CABLE TYPE | CABLE SECTION |
|--------------------------|----------|--------------|-------|--------------|-------|------------|---------------|
| ERF-M12MS8X-NW8-12SGLSZH | M - MALE | S - STRAIGHT | 8 PIN | 12 METERS    | GREEN | LSZH       | 4 x 2 x AWG26 |