




## **ERF8-MSMA3B-10BPUR**

M8 Male,  $0^{\circ}$  Straight, Male,  $90^{\circ}$  Angled, 3 Pin, PUR, 10 Meters, 3x0,34 mm<sup>2</sup>




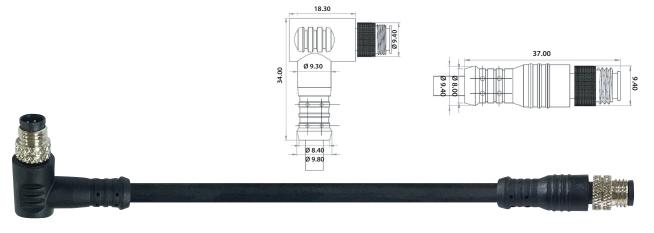









## **Technical Data**

Standard       IEC 61076       Contact Carriers Material       PU / PA         Series       M8, Male, Straight       Contact Material       Copper Alloy, Gold-Plated         Number of Pins       03 PlN       Metal of Nut       Copper Alloy with Nickel Plate         Rated Current       3A max.       Seal       Silicone         Rated Voltage       60V max.       Cable Jacket Material       PUR         Insulation Resistance       ≥100MΩ       Color       Optional         Contact Resistance       ≤ -5mΩ       Shielding       Optional         Ambient Temperature       -25 ~ +75°C       Mechanical Life       > 100 Mating Cycles         IP Class       IP67       —       —				
Series       M8, Male, Straight       Contact Material       Copper Alloy, Gold-Plated         Number of Pins       03 PlN       Metal of Nut       Copper Alloy with Nickel Plate         Rated Current       3A max.       Seal       Silicone         Rated Voltage       60V max.       Cable Jacket Material       PUR         Insulation Resistance       ≥ 100MΩ       Color       Optional         Contact Resistance       ≤ -5mΩ       Shielding       Optional         Ambient Temperature       -25 ~ +75°C       Mechanical Life       > 100 Mating Cycles	Standard	IEC 61076	Contact Carriers Material	PU / PA
Rated Current 3A max. Seal Silicone  Rated Voltage 60V max. Cable Jacket Material PUR  Insulation Resistance $\geq 100 M\Omega$ Color Optional  Contact Resistance $\leq -5 m\Omega$ Shielding Optional  Ambient Temperature $-25 \sim +75 ^{\circ}$ C Mechanical Life $> 100 \text{ Mating Cycles}$	Series			
Rated Voltage 60V max. Cable Jacket Material PUR Insulation Resistance ≥100MΩ Color Optional  Contact Resistance ≤-5mΩ Shielding Optional  Ambient Temperature -25 ~ +75°C Mechanical Life > 100 Mating Cycles	Number of Pins	03 PİN	Metal of Nut	Copper Alloy with Nickel Plat
nsulation Resistance ≥100MΩ Color Optional  Contact Resistance ≤ -5mΩ Shielding Optional  Ambient Temperature -25 ~ +75 °C Mechanical Life > 100 Mating Cycles	Rated Current	3A max.	Seal	Silicone
Contact Resistance ≤ -5mΩ Shielding Optional  Ambient Temperature -25 ~ +75 °C Mechanical Life > 100 Mating Cycles	Rated Voltage	60V max.	Cable Jacket Material	PUR
mbient Temperature -25 ~ +75°C Mechanical Life > 100 Mating Cycles	sulation Resistance	≥100MΩ	Color	Optional
	ontact Resistance	≤ -5mΩ	Shielding	Optional
P Class IP67 — — —	Ambient Temperature	-25 ~ +75°C	Mechanical Life	> 100 Mating Cycles
	IP Class	IP67	_	_

ARTICLE NO	ТҮРЕ	ANGLE	PIN	CABLE LENGTH	COLOR	CABLE TYPE	CABLE SECTION
ERF8-MSMA3B-10BPUR	M - M	S - A	3 PİN	10 METERS	BLACK	PUR	3 x 0,34 mm <sup>2</sup>

