




ERF0A-FA3E-12B-240-PVC

A-18 mm Non-Led Valve Connector, 3 Pin, PVC,
12 Meters, 3x0,75 mm²

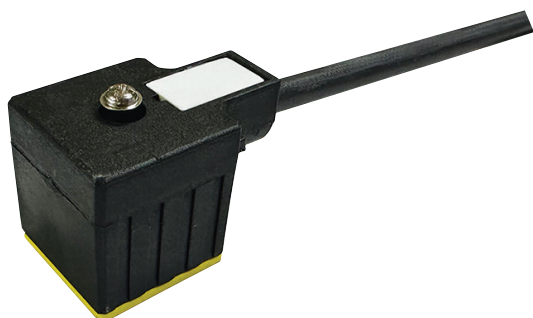

Technical Data

| | | | |
|-----------------------|----------------|---------------------------|---------------------------------|
| Standard | IEC 61076 | Contact Carriers Material | CU / AU |
| Series | Female, Angled | Contact Material | Copper Alloy, Gold-Plated |
| Pin | Cu / Au | Metal of Nut | Copper Alloy with Nickel Plated |
| Rated Current | 3A max. | Seal | Silicone |
| Rated Voltage | 60V max. | Cable Jacket Material | PVC |
| Insulation Resistance | ≥100MΩ | Color | Optional |
| Contact Resistance | ≤ -5mΩ | Shielding | Optional |
| Ambient Temperature | -25 ~ +75°C | Mechanical Life | > 100 Mating Cycles |
| IP Class | IP67 | — | — |

| ARTICLE NO | TYPE | ANGLE | PIN | CABLE LENGTH | COLOR | CABLE TYPE | CABLE SECTION |
|------------------------|------------|------------|-------|--------------|--------------|------------|--------------------------|
| ERF0A-FA3E-12B-240-PVC | F - FEMALE | A - ANGLED | 3 PIN | 12 METERS | BLACK / GREY | PVC | 3 x 0,75 mm ² |