




ERF0B-FA3E-20B-24Y-PUR

B-10 mm Led Valve Connector, 3 Pin, PUR,
20 Meters, 3x0,75 mm²

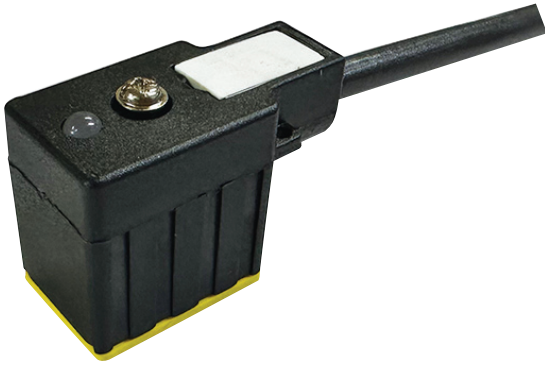

Technical Data

| | | | |
|-----------------------|----------------|---------------------------|---------------------------------|
| Standard | IEC 61076 | Contact Carriers Material | CU / AU |
| Series | Female, Angled | Contact Material | Copper Alloy, Gold-Plated |
| Pin | Cu / Au | Metal of Nut | Copper Alloy with Nickel Plated |
| Rated Current | 3A max. | Seal | Silicone |
| Rated Voltage | 60V max. | Cable Jacket Material | PUR |
| Insulation Resistance | ≥100MΩ | Color | Optional |
| Contact Resistance | ≤-5mΩ | Shielding | Optional |
| Ambient Temperature | -25 ~ +75°C | Mechanical Life | > 100 Mating Cycles |
| IP Class | IP67 | — | — |

| ARTICLE NO | TYPE | ANGLE | PIN | CABLE LENGTH | COLOR | CABLE TYPE | CABLE SECTION |
|------------------------|------------|------------|-------|--------------|--------------|------------|--------------------------|
| ERF0B-FA3E-20B-24Y-PUR | F - FEMALE | A - ANGLED | 3 PIN | 20 METERS | BLACK / GREY | PUR | 3 x 0,75 mm ² |