


# ERF12-MS12D-25BPVC

M12 Male, 0° Straight, 12 Pin, PVC,  
25 Meters, 12x0,14 mm<sup>2</sup>

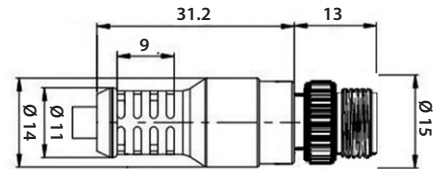

○ White

● Brown

● Green

● Yellow

● Grey


● Pink

● Blue

● Red

● Black

● Navy

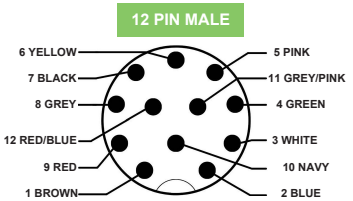

● Grey/Pink ● Red/Blue



## Technical Data

Standard	IEC 61076	Contact Carriers Material	PU / PA
Series	M12, Male, Straight	Contact Material	Copper Alloy, Gold-Plated
Number of Pins	12 Pin	Metal of Nut	Copper Alloy with Nickel Plated
Rated Current	2A max.	Seal	Silicone
Rated Voltage	60V max.	Cable Jacket Material	PVC
Insulation Resistance	≥100MΩ	Color	Optional
Contact Resistance	≤ -5mΩ	Shielding	Optional
Ambient Temperature	-25 ~ +75°C	Mechanical Life	> 100 Mating Cycles
IP Class	IP67	—	—

ARTICLE NO	TYPE	ANGLE	PIN	CABLE LENGTH	COLOR	CABLE TYPE	CABLE SECTION
ERF12-MS12D-25BPVC	M - MALE	S - STRAIGHT	12 PIN	25 METERS	BLACK	PVC	12 x 0,14 mm <sup>2</sup>