

ERF12P-FS12

M12 Female, 0° Straight, 12 Pin



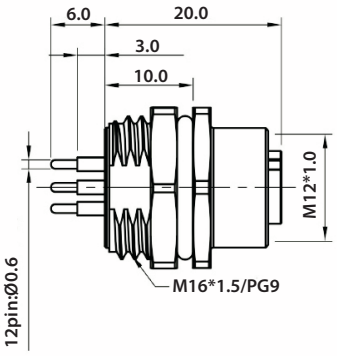

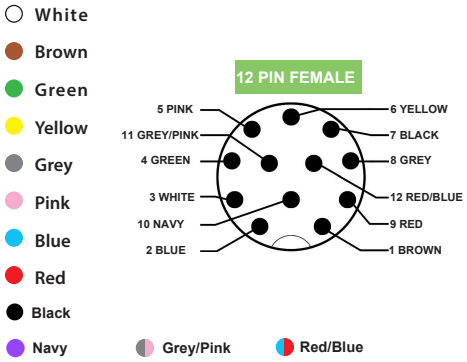

RoHS COMPLIANT · 48 H SALT SPRAY · IP67

Technical Data

Standard	IEC 61076	Contact Carriers Material	PU / PA
Series	M12, Female	Contact Material	Copper Alloy, Gold-Plated
Number of Pins	12 Pin	Metal of Nut	Copper Alloy with Nickel Plated
Rated Current	2A max.	Seal	Silicone
Rated Voltage	60V max.	Cable Jacket Material	—
Insulation Resistance	≥100MΩ	Color	Optional
Contact Resistance	≤ -5mΩ	Shielding	Optional
Ambient Temperature	-25 ~ +75°C	Mechanical Life	> 100 Mating Cycles
IP Class	IP67	—	—

ARTICLE NO	TYPE	ANGLE	PIN
ERF12P- FS12	F - FEMALE	S - STRAIGHT	12 PİN