



ERF12P-FS5

M12 Female, 0° Straight, 5 Pin

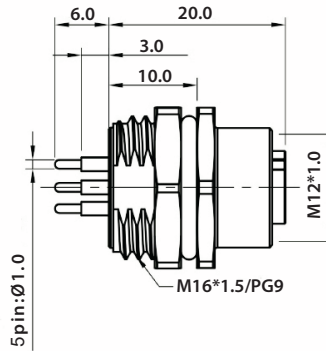

Technical Data

| | | | |
|-----------------------|-------------|---------------------------|---------------------------------|
| Standard | IEC 61076 | Contact Carriers Material | PU / PA |
| Series | M12, Female | Contact Material | Copper Alloy, Gold-Plated |
| Number of Pins | 05 Pin | Metal of Nut | Copper Alloy with Nickel Plated |
| Rated Current | 3A max. | Seal | Silicone |
| Rated Voltage | 60V max. | Cable Jacket Material | — |
| Insulation Resistance | ≥100MΩ | Color | Optional |
| Contact Resistance | ≤ -5mΩ | Shielding | Optional |
| Ambient Temperature | -25 ~ +75°C | Mechanical Life | > 100 Mating Cycles |
| IP Class | IP67 | — | — |

| ARTICLE NO | TYPE | ANGLE | PIN |
|------------|------------|--------------|-------|
| ERF12P-FS5 | F - FEMALE | S - STRAIGHT | 5 PIN |