




# ERF12P-FS5B-0,5PVC

M12 Female, 0° Straight, 5 Pin, PVC,  
0,5 Meters, 5x0,34 mm<sup>2</sup>

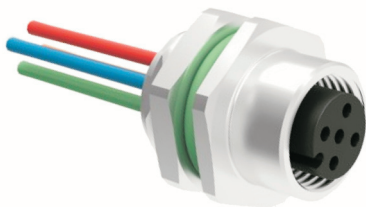

## Technical Data

Standard	IEC 61076	Contact Carriers Material	PU / PA
Series	M12, Female, Straight	Contact Material	Copper Alloy, Gold-Plated
Number of Pins	05 Pin	Metal of Nut	Copper Alloy with Nickel Plated
Rated Current	3A max.	Seal	Silicone
Rated Voltage	60V max.	Cable Jacket Material	PVC
Insulation Resistance	≥100MΩ	Color	Optional
Contact Resistance	≤ -5mΩ	Shielding	Optional
Ambient Temperature	-25 ~ +75°C	Mechanical Life	> 100 Mating Cycles
IP Class	IP67	—	—

ARTICLE NO	TYPE	ANGLE	PIN	CABLE LENGTH	COLOR	CABLE TYPE	CABLE SECTION
ERF12P-FS5B-0,5PVC	F - FEMALE	S - STRAIGHT	5 PIN	0,5 METERS	BROWN-BLUE-BLACK	PVC	5 x 0,34 mm <sup>2</sup>