



# ERF12P-MS12D-0,2PVC

M12 Male, 0° Straight, 12 Pin, PVC,  
0,2 Meters, 12x0,14 mm<sup>2</sup>

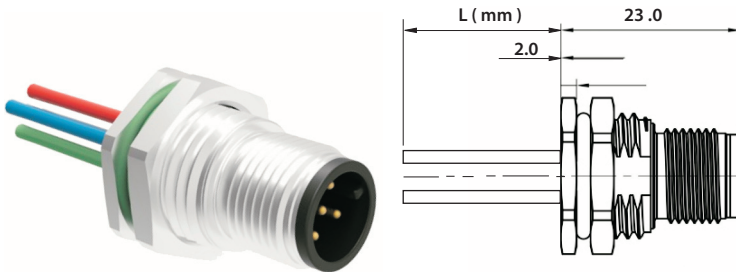

- White
- Brown
- Green
- Yellow
- Grey
- Pink
- Blue
- Red
- Black
- Navy

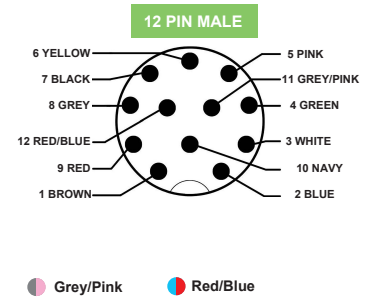

## Technical Data

Standard	IEC 61076	Contact Carriers Material	PU / PA
Series	M12, Male, Straight	Contact Material	Copper Alloy, Gold-Plated
Number of Pins	12 Pin	Metal of Nut	Copper Alloy with Nickel Plated
Rated Current	2A max.	Seal	Silicone
Rated Voltage	60V max.	Cable Jacket Material	PVC
Insulation Resistance	≥100MΩ	Color	Optional
Contact Resistance	≤ -5mΩ	Shielding	Optional
Ambient Temperature	-25 ~ +75°C	Mechanical Life	> 100 Mating Cycles
IP Class	IP67	—	—

ARTICLE NO	TYPE	ANGLE	PIN	CABLE LENGTH	COLOR	CABLE TYPE	CABLE SECTION
ERF12P-MS12D-0,2PVC	M - MALE	S - STRAIGHT	12 PIN	0,2 METERS	BROWN-BLUE-BLACK	PVC	12 x 0,14 mm <sup>2</sup>