
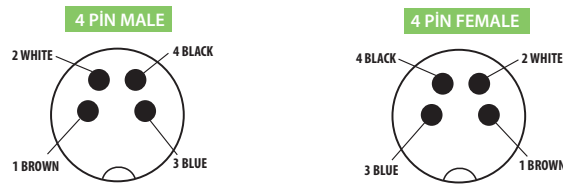


# ERF8-FAMS4B-25BPUR

M8 Female, 90° Angled, Male, 0° Straight, 4 Pin, PUR, 25 Meters, 4x0,34 mm<sup>2</sup>

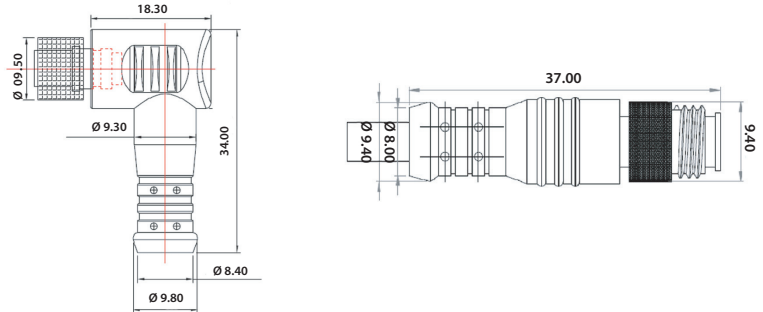

## Technical Data

|                       |                                  |                           |                                 |
|-----------------------|----------------------------------|---------------------------|---------------------------------|
| Standard              | IEC 61076                        | Contact Carriers Material | PU / PA                         |
| Series                | M8, Male/Female, Angled/Straight | Contact Material          | Copper Alloy, Gold-Plated       |
| Number of Pins        | 04 Pin                           | Metal of Nut              | Copper Alloy with Nickel Plated |
| Rated Current         | 3A max.                          | Seal                      | Silicone                        |
| Rated Voltage         | 60V max.                         | Cable Jacket Material     | PUR                             |
| Insulation Resistance | ≥100MΩ                           | Color                     | Optional                        |
| Contact Resistance    | ≤ -5mΩ                           | Shielding                 | Optional                        |
| Ambient Temperature   | -25 ~ +75°C                      | Mechanical Life           | > 100 Mating Cycles             |
| IP Class              | IP67                             | —                         | —                               |

| ARTICLE NO         | TYPE  | ANGLE | PIN   | CABLE LENGTH | COLOR | CABLE TYPE | CABLE SECTION            |
|--------------------|-------|-------|-------|--------------|-------|------------|--------------------------|
| ERF8-FAMS4B-25BPUR | F - M | S - A | 4 PIN | 25 METERS    | BLACK | PUR        | 4 x 0,34 mm <sup>2</sup> |