



# ERF8-FSFA4C-05BPUR

M8 Female, 0° Straight, Female, 90° Angled, 4 Pin, PUR, 05 Meters, 4x0,22 mm<sup>2</sup>

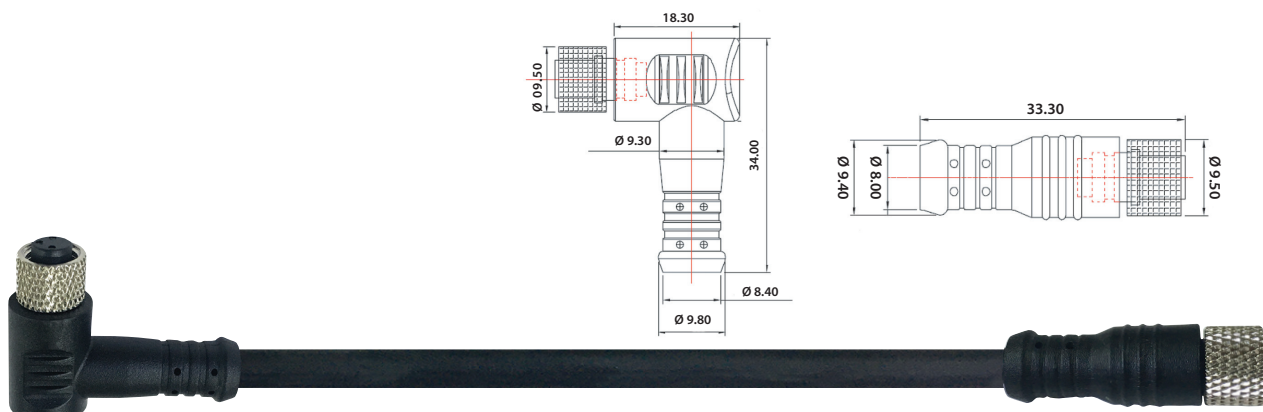

## Technical Data

|                       |                             |                           |                                 |
|-----------------------|-----------------------------|---------------------------|---------------------------------|
| Standard              | IEC 61076                   | Contact Carriers Material | PU / PA                         |
| Series                | M8, Female, Straight/Angled | Contact Material          | Copper Alloy, Gold-Plated       |
| Number of Pins        | 04 Pin                      | Metal of Nut              | Copper Alloy with Nickel Plated |
| Rated Current         | 3A max.                     | Seal                      | Silicone                        |
| Rated Voltage         | 60V max.                    | Cable Jacket Material     | PUR                             |
| Insulation Resistance | ≥100MΩ                      | Color                     | Optional                        |
| Contact Resistance    | ≤ -5mΩ                      | Shielding                 | Optional                        |
| Ambient Temperature   | -25 ~ +75°C                 | Mechanical Life           | > 100 Mating Cycles             |
| IP Class              | IP67                        | —                         | —                               |

| ARTICLE NO         | TYPE  | ANGLE | PIN   | CABLE LENGTH | COLOR | CABLE TYPE | CABLE SECTION            |
|--------------------|-------|-------|-------|--------------|-------|------------|--------------------------|
| ERF8-FSFA4C-05BPUR | F - F | S - A | 4 PIN | 5 METERS     | BLACK | PUR        | 4 x 0,22 mm <sup>2</sup> |