




ERF8-MSFS4B-25BPVC

M8 Male, 0° Straight, Female, 0° Straight, 4 Pin, PVC,
25 Meters, 4x0,34 mm²

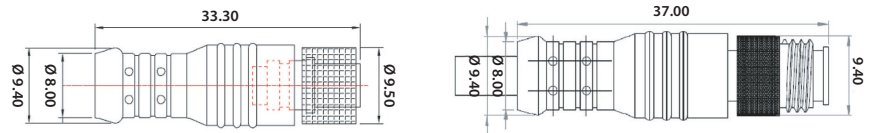

Technical Data

| | | | |
|-----------------------|---------------------------|---------------------------|---------------------------------|
| Standard | IEC 61076 | Contact Carriers Material | PU / PA |
| Series | M8, Male/Female, Straight | Contact Material | Copper Alloy, Gold-Plated |
| Number of Pins | 04 Pin | Metal of Nut | Copper Alloy with Nickel Plated |
| Rated Current | 3A max. | Seal | Silicone |
| Rated Voltage | 60V max. | Cable Jacket Material | PVC |
| Insulation Resistance | ≥100MΩ | Color | Optional |
| Contact Resistance | ≤ -5mΩ | Shielding | Optional |
| Ambient Temperature | -25 ~ +75°C | Mechanical Life | > 100 Mating Cycles |
| IP Class | IP67 | — | — |

| ARTICLE NO | TYPE | ANGLE | PIN | CABLE LENGTH | COLOR | CABLE TYPE | CABLE SECTION |
|--------------------|-------|-------|-------|--------------|-------|------------|--------------------------|
| ERF8-MSFS4B-25BPVC | F - M | S - S | 4 PIN | 25 METERS | BLACK | PVC | 4 x 0,34 mm ² |