




## **ERF8-MSMA4C-05BPVC**

M8 Male,  $0^{\circ}$  Straight, Male,  $90^{\circ}$  Angled, 4 Pin, PVC, 05 Meters,  $4x0,22 \, \text{mm}^2$ 




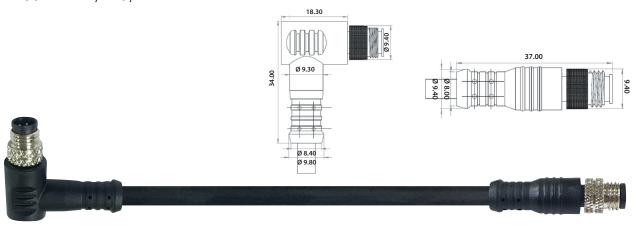









## **Technical Data**

Standard	IEC 61076	Contact Carriers Material	PU / PA	
Series	M8, Male, Straight	Contact Material	Copper Alloy, Gold-Plated	
Number of Pins	04 Pin	Metal of Nut Copper Alloy with Nickel Plate		
Rated Current	3A max.	Seal	Silicone	
Rated Voltage	60V max.	Cable Jacket Material	PVC	
Insulation Resistance	≥100MΩ	Color	Optional	
Contact Resistance	≤ -5mΩ	Shielding	Optional	
Ambient Temperature	-25 ~ +75°C	Mechanical Life	> 100 Mating Cycles	
IP Class	IP67	_	_	

ARTICLE NO	TYPE	ANGLE	PIN	CABLE LENGTH	COLOR	CABLE TYPE	CABLE SECTION
ERF8-MSMA4C-05BPVC	M - M	S - A	4 PİN	5 METERS	BLACK	PVC	4 x 0,22 mm <sup>2</sup>

