
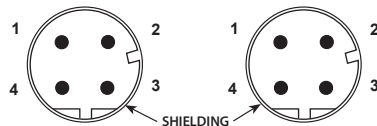


# ERFD-FSFS4A-0,60GPUR

D Code M12 Female 0° Straight, D Code M12 Female 0° Straight,  
4 Pin, PUR, 0,60 Meters

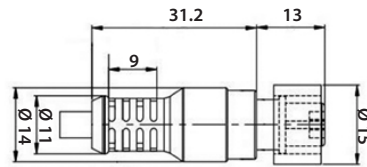

### Technical Data

|                       |                   |                           |                                 |
|-----------------------|-------------------|---------------------------|---------------------------------|
| Standard              | IEC 61076         | Contact Carriers Material | CU / AU                         |
| Series                | Female , Straight | Contact Material          | Copper Alloy, Gold-Plated       |
| Pin                   | Cu / Au           | Metal of Nut              | Copper Alloy with Nickel Plated |
| Rated Current         | 1,5 A max         | Seal                      | Silicone                        |
| Rated Voltage         | 60V max.          | Cable Jacket Material     | PUR                             |
| Insulation Resistance | ≥100MΩ            | Color                     | Optional                        |
| Contact Resistance    | ≤ -5mΩ            | Shielding                 | Optional                        |
| Ambient Temperature   | -25 ~ +85°C       | Mechanical Life           | > 100 Mating Cycles             |
| IP Class              | IP67              | —                         | —                               |

| ARTICLE NO           | TYPE  | ANGLE | PIN   | CABLE LENGTH | COLOR | CABLE TYPE | CABLE SECTION |
|----------------------|-------|-------|-------|--------------|-------|------------|---------------|
| ERFD-FSFS4A-0,60GPUR | F - F | S - S | 4 PIN | 0,6 METERS   | GREEN | PUR        | 4 x 1 x AWG26 |