
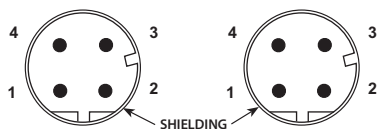


ERFD-MSMS4A-07,5GLSZH

D Code M12 Male 0° Straight, D Code M12 Male 0° Straight, 4 Pin, LSZH, 07,5 Meters



Technical Data

| | | | |
|-----------------------|----------------|---------------------------|---------------------------------|
| Standard | IEC 61076 | Contact Carriers Material | CU / AU |
| Series | Male, Straight | Contact Material | Copper Alloy, Gold-Plated |
| Pin | Cu / Au | Metal of Nut | Copper Alloy with Nickel Plated |
| Rated Current | 1,5 A max | Seal | Silicone |
| Rated Voltage | 60V max. | Cable Jacket Material | LSZH |
| Insulation Resistance | ≥100MΩ | Color | Optional |
| Contact Resistance | ≤ -5mΩ | Shielding | Optional |
| Ambient Temperature | -25 ~ +85°C | Mechanical Life | > 100 Mating Cycles |
| IP Class | IP67 | — | — |

| ARTICLE NO | TYPE | ANGLE | PIN | CABLE LENGTH | COLOR | CABLE TYPE | CABLE SECTION |
|-----------------------|----------|--------------|-------|--------------|-------|------------|---------------|
| ERFD-MSMS4A-07,5GLSZH | M - MALE | S - STRAIGHT | 4 PIN | 7,5 METERS | GREEN | LSZH | 4 x 1 x AWG26 |