



ERF12-FSFS4B-20BPVC

M12 Female, 0° Straight, Female, 0° Straight, 4 Pin, PVC, 20 Meters, 4x0,34 mm²

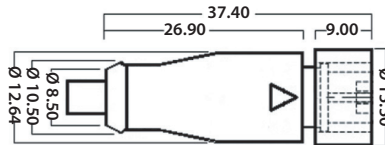

Technical Data

| | | | |
|-----------------------|-----------------------|---------------------------|---------------------------------|
| Standard | IEC 61076 | Contact Carriers Material | PU / PA |
| Series | M12, Female, Straight | Contact Material | Copper Alloy, Gold-Plated |
| Number of Pins | 04 Pin | Metal of Nut | Copper Alloy with Nickel Plated |
| Rated Current | 4,8A max. | Seal | Silicone |
| Rated Voltage | 60V max. | Cable Jacket Material | PVC |
| Insulation Resistance | ≥100MΩ | Color | Optional |
| Contact Resistance | ≤ -5mΩ | Shielding | Optional |
| Ambient Temperature | -25 ~ +75°C | Mechanical Life | > 100 Mating Cycles |
| IP Class | IP67 | — | — |

| ARTICLE NO | TYPE | ANGLE | PIN | CABLE LENGTH | COLOR | CABLE TYPE | CABLE SECTION |
|---------------------|-------|-------|-------|--------------|-------|------------|--------------------------|
| ERF12-FSFS4B-20BPVC | F - F | S - S | 4 PIN | 20 METERS | BLACK | PVC | 4 x 0,34 mm ² |