



# ERF12-FSFS4C-25BPUR

M12 Female, 0° Straight, Female, 0° Straight, 4 Pin, PUR, 25 Meters, 4x0,22 mm<sup>2</sup>

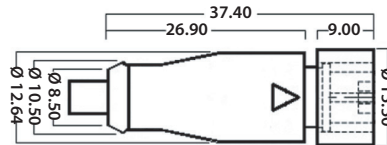

### 4 PIN FEMALE



### Technical Data

|                       |                       |                           |                                 |
|-----------------------|-----------------------|---------------------------|---------------------------------|
| Standard              | IEC 61076             | Contact Carriers Material | PU / PA                         |
| Series                | M12, Female, Straight | Contact Material          | Copper Alloy, Gold-Plated       |
| Number of Pins        | 04 Pin                | Metal of Nut              | Copper Alloy with Nickel Plated |
| Rated Current         | 4,5A max.             | Seal                      | Silicone                        |
| Rated Voltage         | 60V max.              | Cable Jacket Material     | PUR                             |
| Insulation Resistance | ≥100MΩ                | Color                     | Optional                        |
| Contact Resistance    | ≤ -5mΩ                | Shielding                 | Optional                        |
| Ambient Temperature   | -25 ~ +75°C           | Mechanical Life           | > 100 Mating Cycles             |
| IP Class              | IP67                  | —                         | —                               |

| ARTICLE NO          | TYPE  | ANGLE | PIN   | CABLE LENGTH | COLOR | CABLE TYPE | CABLE SECTION            |
|---------------------|-------|-------|-------|--------------|-------|------------|--------------------------|
| ERF12-FSFS4C-25BPUR | F - F | S - S | 4 PIN | 25 METERS    | BLACK | PUR        | 4 x 0,22 mm <sup>2</sup> |