




## **ERF12-FSFA5B-10BPUR**

M12 Female, 0° Straight, Female, 90° Angled, 5 Pin, PUR, 10 Meters,  $5x0,34~\text{mm}^2$ 




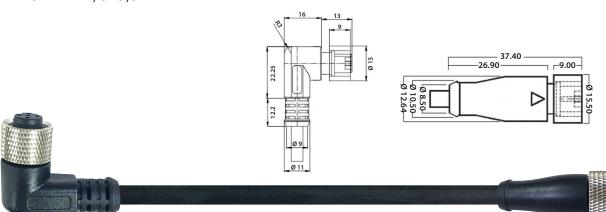









## **Technical Data**

Standard	IEC 61076	Contact Carriers Material	PU / PA	
Series	M12, Female, Straight, Angled	Contact Material	Copper Alloy, Gold-Plated	
Number of Pins	05 Pin	Metal of Nut	Copper Alloy with Nickel Plated	
Rated Current	4,8A max.	Seal	Silicone	
Rated Voltage	60V max.	Cable Jacket Material	PUR	
Insulation Resistance	≥100MΩ	Color	Optional	
Contact Resistance	≤ -5mΩ	Shielding	Optional	
Ambient Temperature	-25 ∼ +75°C	Mechanical Life	> 100 Mating Cycles	
IP Class	IP67	_	_	

ARTICLE NO	TYPE	ANGLE	PIN	CABLE LENGTH	COLOR	CABLETYPE	CABLE SECTION
ERF12-FSFA5B-10BPUR	F-F	A - S	5 PİN	10 METERS	BLACK	PUR	5 x 0,34 mm <sup>2</sup>

