




# ERF12-MSFS4B-25BPUR

M12 Male, 0° Straight, Female, 0° Straight, 4 Pin, PUR, 25 Meters, 4x0,34 mm<sup>2</sup>

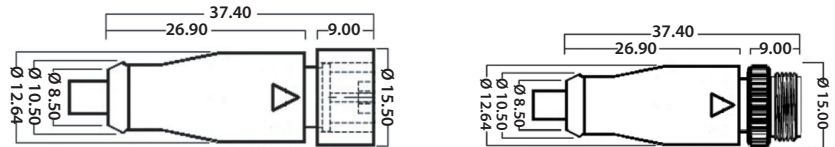

## Technical Data

Standard	IEC 61076	Contact Carriers Material	PU / PA
Series	M12, Male/Female, Straight	Contact Material	Copper Alloy, Gold-Plated
Number of Pins	04 Pin	Metal of Nut	Copper Alloy with Nickel Plated
Rated Current	3A max.	Seal	Silicone
Rated Voltage	60V max.	Cable Jacket Material	PUR
Insulation Resistance	≥100MΩ	Color	Optional
Contact Resistance	≤ -5mΩ	Shielding	Optional
Ambient Temperature	-25 ~ +75°C	Mechanical Life	> 100 Mating Cycles
IP Class	IP67	—	—

ARTICLE NO	TYPE	ANGLE	PIN	CABLE LENGTH	COLOR	CABLE TYPE	CABLE SECTION
ERF12-MSFS4B-25BPUR	F - M	S - S	4 Pin	25 METERS	BLACK	PUR	4 x 0,34 mm <sup>2</sup>